

SAFETY LED LIGHTS



 **CHROMATE[®]**
INDUSTRIAL CORP.

SAFETY LED LIGHTS

Work Light – Heavy Duty

- Flashlight – Floodlight – Dual-light
- Rechargeable
- Anti-roll Tri-Lobal Design
- Bright LEDs – 50,000 hour life
- Microprocessor controlled
- Impact and chemical resistant housing
- Replaceable NiMH battery pack
- 3 hour charge time
- AC & DC adapters included



Specifications

- Flashlight: 300 Lumens
- Floodlight: 400 Lumens
- Selectable flashlight or floodlight strobe
- Run-time: Flashlight or floodlight 9 hours, Flashlight strobe 24+ hours, Dual-light 4 hours, Dual-light strobe 7 hours
- Vehicle mount
- Moisture resistant
- Traffic Cone Accessories
 - Red P/N 66355R
 - Yellow P/N 66355Y



P/N 66354



Made in
the USA



Work Light – Heavy Duty

- Flashlight – Floodlight – Dual-light
- Rechargeable
- Anti-roll Tri-Lobal Design
- Bright LEDs – 50,000 hour life
- Impact and chemical resistant housing
- Replaceable NiMH battery pack
- 3 hour charge time
- AC & DC adapters included



Specifications

- Flashlight: 160 Lumens
- Floodlight: 200 Lumens
- Dual-switch control
- Tandem operation
- Auto-strobe
- Run-time: Flashlight 6 hours, Floodlight 2 hours, Both 2 hours
- Waterproof to 3 feet (IP-67)
- Traffic Cone Accessories
 - Red P/N 66357R
 - Yellow P/N 66357Y



P/N 66356



Made in
the USA



SAFETY LED LIGHTS

Work Light – 66 LED/Magnetic

- Dual Function / Spotlight – Floodlight
- Rechargeable
- 35,000 hour LED life
- 60 LED Floodlight / 6 LED Spotlight
- Bright white LEDs
- Impact and chemical resistant housing
- Will stand upright on flat surface
- Dual position magnetic hook attaches to top or side
- Rechargeable NiMH battery pack
- 8 hour charge time
- AC & DC adapters included



P/N 66358



Specifications

- Spotlight: 12 Lumens
- Floodlight: 120 Lumens
- Length: 14.25" (without hook)
- Weight: 9.5 oz with battery
- Dual purpose magnet
- Run-time: Spotlight 18 hours / Floodlight 4 hours
- 3 position rocker switch



Magnetic Hook – P/N 66358HOOK

Work Light – Safety Orange

- Dual-Mode Flashlight – Floodlight
- Rechargeable high quality NiMH battery
- Bright white LEDs
- 35,000 hour life
- Small size – Light weight
- Safety orange housing
- Impact and chemical resistant
- Removable hanger-hook and magnet
- Long run-time per charge
- Home and car chargers included



P/N 66380



Specifications

- Flashlight: 1 LED = 65 Lumens
- Floodlight: 60 LEDs = 120 Lumens
- Run-time 4 hrs. flashlight, 4 hrs. floodlight
- Charge time 4 hours
- Length: 11.5 in.
- Weight: 12.0 oz

SAFETY LED LIGHTS

Slim Line

- Flashlight – Floodlight – Dual-light
- Super-bright white LEDs
- 35,000 hour life
- Small size – Light weight
- Moisture and impact resistant
- Safety orange housing
- Premium AAA batteries included
- Soft-touch matte finish



P/N 66352

P/N 66351



Specifications – P/N 66351

- Flashlight: 1 LED = 25 Lumens
- Floodlight: 12 LEDs = 24 Lumens
- Run-time: 18 hours flashlight, 15 hours floodlight, 8 hours Dual-light
- Pocket-clip and holster included
- Traffic Cone Accessories
 - Red P/N 66353R
 - Yellow P/N 66353Y



Specifications – P/N 66352

- Flashlight: 1 LED = 65 Lumens
- Floodlight: 36 LEDs = 72 Lumens
- Run-time: 12 hours flashlight, 7 hours floodlight, 5 hours Dual-light
- Holster and clip-magnet included
- Traffic Cone Accessories
 - Red P/N 66353R
 - Yellow P/N 66353Y



Head Lamp

- Spotlight – Floodlight – Dual-light
- Super-bright white LEDs
- 35,000 hour life
- Selectable light control
- Adjustable tilt
- Non-slip headband
- Small size – Light weight
- Moisture and impact resistant
- Safety orange or black housing
- Premium AAA batteries included
- Soft-touch matte finish



P/N 66350



P/N 66350B

Specifications

- Spotlight: 1 LED = 65 Lumens
- Floodlight: 12 LEDs = 24 Lumens
- Tight focus spotlight beam
- Broad beam floodlight
- Activate both for maximum area illumination
- Run-time: 18 hours Flashlight and Floodlight, 10 hours Dual-light

SAFETY LED LIGHTS

Clamp Light – Hands Free

- Spotlight/Flashlight – Floodlight – Dual-Light
- 35,000 hour LED life
- 1 Spotlight LED
- 12 Floodlight LEDs
- Multi-Function Locking Clamp
 - Stands By Itself
 - Secures to Round or Flat Objects
- Light Reaches Out In All Directions
 - Light Swivels 360°
 - Light Tilts 180° +
- Impact & Moisture Resistant Light Housing
- Engineered Polymer Clamp Base
- Premium AAA Batteries Included



P/N 66359

Self Standing

Specifications

- Spotlight: 65 Lumens
- Floodlight: 24 Lumens
- Dual-Light: 89 Lumens
- Detachable Light with Magnetic Base
- 2 Beam Flashlight
- Run-time: Up to 18 hours



Detachable Light with Magnetic Base



Square Stock



Round Stock



2 Beam Flashlight

3-in-1 LED Tool Light

1. Tool Light

Manual or powerdriver use slide on manual standard screwdrivers (5 mm-11 mm & 3/16"-7/16") or cordless 1/4" powerdriver.

2. Magnetic

Strong magnets hold the tool and flashlight in place on any metal surface.

3. Inspection

Easy to use, provides light on the spot where you need it.

Specifications

- 3 LEDs for a wide beam and super bright illumination
- Shock resistant LED bulbs last 100,000 hours
- On/Off switch – Turn ring clockwise to turn on light
- Non-slip rubber housing – weatherproof
- Powered by 3 micro alkaline cells, Type LR 44 (included)*
- Applications: Handyman work • Tents • RVs • Attic • Basement • Closets
Medicine Cabinet • Under Car Hood • Power Outages • Boats • Under the Sink
Under Tables/Desks



P/N 66348

Lights up that dark area and makes it easy to see


SAFETY LED LIGHTS

Extendable Magnetic LED Flashlight



P/N 66349

- Metal Casing
- Weight: 3.5 ounces
- Magnet at Light is for Powerful Retrieval
- Magnet on Grip Acts as A Third Hand
- 3 Super-Bright LEDs
- Extends from 6.5" to 21"
- Flexible Shaft to Access Hard-to-Reach Places
- A Pick-Up Tool and a Flashlight
- Uses 4 LR44 Batteries (included)
- Replacement Batteries - LR44 1.5V 4 PK P/N 29206
- Utility Tool Holster P/N 70005

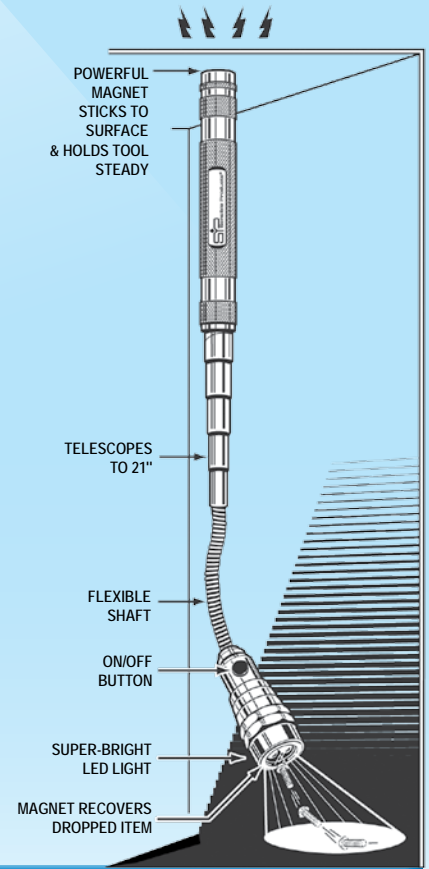

Pocket Floodlight

- Up to 10X brighter than ordinary penlights
- Pure Cool White LED High Performance Light
- Lightweight & Compact
- Clips easily and comfortably into any pocket
- Indestructible Aluminum T6 w/ Black Type II Anodized Body
- Water & Dirt Resistant
- Rugged tailcap switch — rated at 100,000 cycles
- Batteries Included
- Designed for all technicians in a demanding shop
- For use in manufacturing or maintenance environments

Specifications

- Brightness: 120 Lumens
- Forward Current: 400 mA
- Battery Voltage: Between 3.3 and 4.8 volts
- 3 AAAA alkaline batteries, included*
- Run-Time: 2 hours to half brightness, 4 hours light w/ typical intermittent use
- Reflector: Custom design w/ bright center spot, orange peel (OP) surface for an even spill beam
- Switch Tailcap: Click ON/Click OFF equipped with a rubber cap that seals out dirt and grit
- Water Resistant: Threaded joints have rubber o-ring seals, tailcap switch is sealed with a rubber cap
- Head Diameter: 9/16" (14 mm)
- Body Diameter: 7/16" (10 mm)
- Body length: 6" (15 cm)



P/N 66341



*6-pack AAAA batteries: P/N 29207

SAFETY LED LIGHTS


Red Pocket LED Floodlight

- Up to 10X brighter than ordinary "Red" LED penlights
- LED high performance light
- Lightweight and compact
- Clips easily and comfortably into any pocket
- T6 Aluminum with Red Type II Anodized Body
- Water and dirt resistant
- Rugged tailcap switch – rated at 100,000 cycles
- Energizer batteries included
- **Applications:** Preserves night vision of individuals; Aviators reading flight plans
Security; Reading equipment in the dark; Doctors/Nurses monitoring patients
Military/Police; Emergency Service Personnel; Astronomers; Photographers; Ushers

Specifications

- Brightness: 46 Lumens
- LED Wavelength: Cree Xp-C, Red 620-630 nm
- Forward Current: 350 mA
- Battery Voltage: Between 3.3 and 4.8 volts
- 3 AAAA alkaline batteries, included*
- Run-Time: 2 hours to half brightness, 4 hours light w/ typical intermittent use
- Reflector: Custom design w/ bright center spot, orange peel (OP) surface for a huge floodlight beam
- Switch Tailcap: Click ON / click OFF, plus half-press momentary on equipped with a rubber cap that seals out dirt and grit
- Water Resistant: Threaded joints have rubber o-ring seals, tailcap switch is sealed with a rubber cap
- Head Diameter: 9/16" (14 mm)
- Body Diameter: 7/16" (10 mm)
- Body length: 6" (15 cm)

P/N 66333

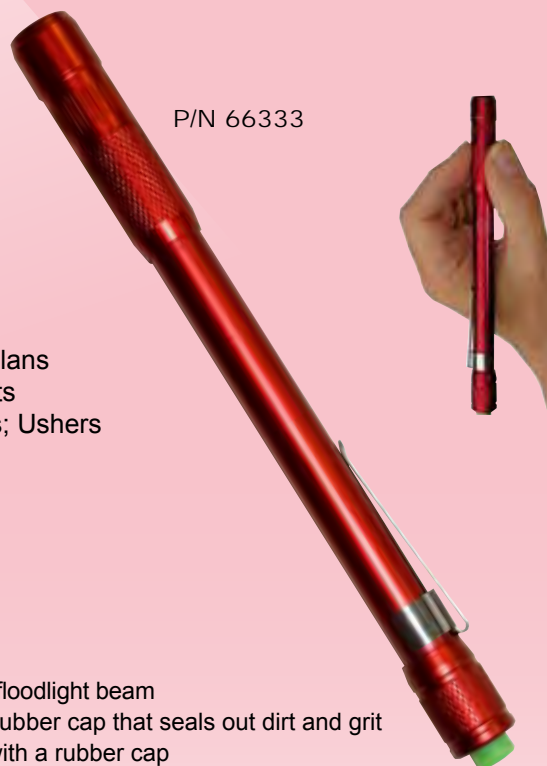

*6-pack AAAA batteries: **P/N 29207**

Professional UV LED Inspection Floodlight

- Up to 20X brighter than ordinary UV penlights
- High performance UV LED light
- Lightweight and compact
- Clips easily and comfortably into any pocket
- T6 Aluminum with Violet Type II Anodized Body
- Water and dirt resistant
- Rugged tailcap switch – rated at 100,000 cycles
- Energizer batteries included
- **Applications:** A/C refrigerant dye leak detection; Hairline crack detection/Quality control
Fluorescent hand stamp verification; Dog, cat & rodent urine stain detection
Restroom cleanliness inspection; Document and lab analysis; Crime scene investigation
Paint authentication; Currency verification; Bacteria detection; Gem inspection; UV curing

Specifications

- Brightness: 120 mW emitter radiant flux
- LED Wavelength: UltraViolet (UVA) 400-405 nm
- Forward Current: 350 mA
- Battery Voltage: Between 3.3 and 4.8 volts
- 3 AAAA alkaline batteries, included*
- Run-Time: 2 hours to half brightness, 4 hours light w/ typical intermittent use
- Reflector: Custom design with a bright center spot, orange peel (OP) surface for an even beam
- Switch Tailcap: Click ON / click OFF, plus half-press momentary on equipped with a rubber cap that seals out dirt and grit
- Water Resistant: Threaded joints have rubber o-ring seals, tailcap switch is sealed with a rubber cap
- Head Diameter: 9/16" (14 mm)
- Body Diameter: 7/16" (10 mm)
- Body length: 6" (15 cm)

P/N 66334



CAUTION
Wear 100% UVA
blocking safety
glasses when using.
Do not shine the light
in anyone's eyes.

*6-pack AAAA batteries: **P/N 29207**

SAFETY LED LIGHTS

Intrinsically Safe LED Dual-Light

- Safety rated
- Designed for hazardous workplace environments
- Safe to use in potentially explosive atmospheres
- Dual-Light Innovation®
- 80 Lumen CREE® XPE LED
- Sharp Focused Flashlight
- Broad Beam Floodlight
- 50,000 hour LED life
- Separate switches control flashlight and floodlight
- Momentary or constant-on
- Non-slip grip textured push-buttons
- Rugged hi-visibility green polymer housing
- Impact and chemical resistant
- Built-in pocket clip and lanyard
- Waterproof to 1 meter (IP67)
- Length: 7.0 in (178 mm)
- Limited lifetime warranty



ANSI Performance

- Flashlight: 80 Lumens
- Floodlight: 80 Lumens
- Dual-Light: 160 Lumens
- Flashlight beam distance: 95 m
- Run-time:
 - 14.5 hours Flashlight/Floodlight
 - 7.2 hours Dual-light

Note: The Intrinsically Safe LED Dual-Light uses 3 AA alkaline batteries (not included). Order batteries with P/N 29203.



P/N 66339




Technician's Floodlight

- Over 300 lumens of brilliant white light with no hot spots or dark spots
- Strong, retractable hook allows you to hang it
- Dual rare-earth magnets, for fastening it to a work-space
- Removable belt clip
- Head tilts 180° and rotates 360°
- 6 AA rechargeable NiMH battery pack included, with smart recharger
- Run-time: High: 2 hours continuous, Low: 8 hours
- Battery condition indicator light
- Ergonomic light-weight, secure grip
- Includes a 12V charger and a 120V charger
- Flared base allows standing light on end
- Standard 1/4-20 threaded hole in base for tripod (not included)
- Length: 10-1/4" (26 cm)
- Weight: 1 lb (0.5 kg)
- **Applications:** Automotive; Industrial; HVAC repairmen; IT maintenance; Emergencies; Power Outages

Specifications

- Brightness: *High:* 300 emitter lumens / *Low:* 75 emitter lumens
- Color: Cool White
- LED: Cree XP-G, 5 W
- Material: High impact ABS, except hook, which is glass reinforced ABS
- Head Adjustment: Tilt tension adjustment screw prevents head from flopping
- Hook length: 3" (7.5 cm) when extended, retracts into body of floodlight

- Hook diameter: 1" (2.5 cm)
- Magnets: 2 co-planar, nickel-plated, neodymium rare-earth magnets
- Charger: Smart switching charger, 120 VAC with standard "Type A", 2 prong plug
- Recharge time: About 6 hours

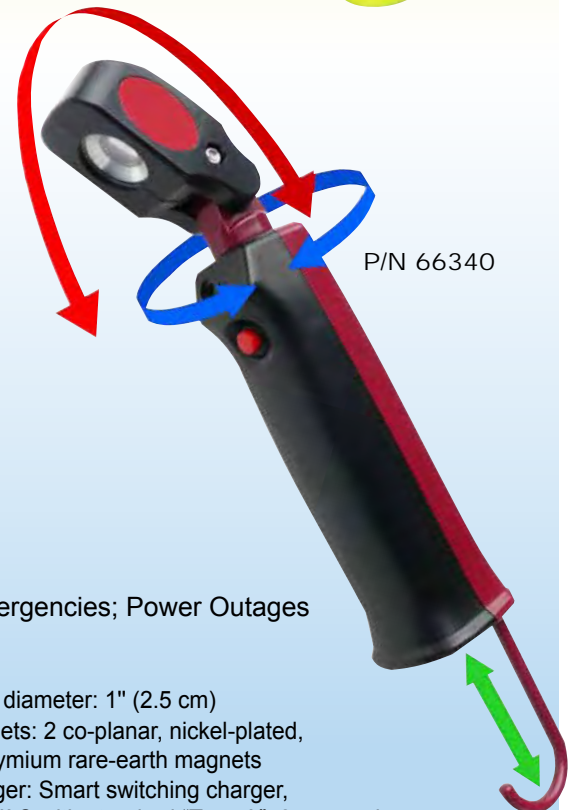

P/N 66340